


## PORMA GOLD LIMESTONE

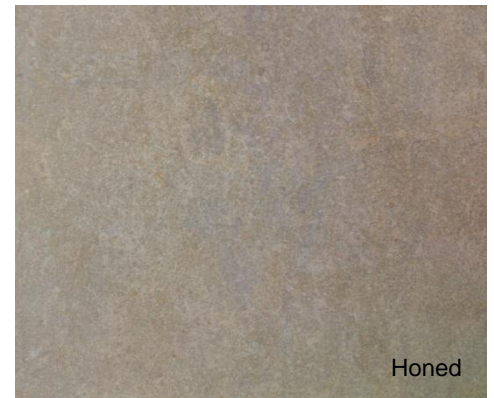

TEST METHODS	RESULTS
Petrographic Examination (UNE-EN 12407:2007)	<i>Peloidal Dolomite-Sparstone</i>
Water Absorption (UNE-EN 13755:2007)	<i>Mean Value 3,9%</i>
Apparent Density and Open Porosity (UNE-EN 1936:2007)	<i>Mean Value of Apparent Density 2.430 Kg / m3 Mean Value of Open Porosity 13,9 %</i>
Frost Resistance (12 cycles) (UNE-EN 12371:2011)	<i>Mean Value of Flexural Strength 12,9 MPa</i>
Flexural Strength (UNE-EN 12372:2007)	<i>Mean Value of Flexural Strength 12,3 MPa</i>
Breaking Load at Dowel Hole (UNE-EN 13364:2002)	<i>Mean Value of Breaking Load 1400 N</i>
Water Absorption by Capillarity (UNE-EN 1925:1999)	<i>Mean Value of Coefficients 13,1 g / m2s0,5</i>